

2.5 gpm multifunction handshower kit K-22176

Features

- Includes Bancroft[®] 2.5-gpm multifunction handshower, 60" metal hose, 30" slidebar and traditional slidebar trim.
- Advanced spray engine provides three experiences: full coverage, pulsating massage and silk spray.
- Full-coverage spray produces an encompassing spray for everyday use and utilizes Katalyst[®] air induction to create large, full drops.
- Pulsating massage spray targets sore muscles to ease away aches and pains.
- Silk spray releases a dense, luxurious spray ideal for rinsing.
- Thumb tab allows for a smooth transition between sprays.
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use.
- MasterClean[™] sprayface resists hard water buildup and is easy to clean.
- 2.5 gpm (9.5 lpm) maximum flow rate.
- 30" slidebar features adjustable mounting brackets for installation flexibility.
- Coordinates with Bancroft[®] and Devonshire[®] faucets and accessories.

Material

KOHLER finishes resist corrosion and tarnishing.





Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze



Bancroft®

KOHLER, Faucets

2.5 gpm multifunction handshower kit K-22176

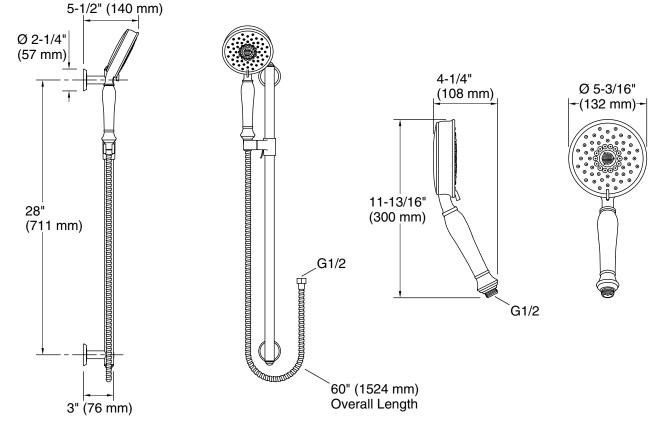

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum flow:2.5 gal/min (9.5 l/min)Pressure:45 psi (3.1 bar)

Pressure and Supply Requirements

Fixture pressure min 45 psi (310.3 kPa) (static):

Fixture Supply Requirements

Min static pressure:	45 psi (310.3 kPa)
Min flow rate:	2.5 gpm (9.5 lpm)

Notes

Install this product according to the installation instructions.

IMPORTANT! The slide bar must be mounted to stud framing supports at both the top and bottom mounting locations. Plastic wall anchors will not support the slide bar. Do not use or depend on plastic wall anchors to attach the slide bar.

Plumbing codes may require that an atmospheric vacuum breaker be installed in-line to handshowers. Consult with local codes.

ADA, OBC compliant when installed to the specific requirements of these regulations.

