

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

LED Flush Mount

Features

This low profile design provides a dramatic look and features an edge-lit panel construction. Products can be used in various applications including corridors, bath, hallway, kitchen and anywhere general lighting is needed. Mounts to standard junction box (not included).

Construction

Housing is die-formed steel. Standard mounting holes and hardware included. Power supply connections must be made inside junction box (not included).

Finish

Choose from painted black outer/gold inner or white outer/black inner finish combination.

Diffuser

White acrylic.

Electrical

Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable down to 10% of full scale with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

Lamping


Fixture includes a LED modules capable of producing:
12" - 17.5W, 1400 source lumens
16" - 31W, 2600 source lumens
3000K (CCT). Rated for 50,000 Hrs. 90 CRI.

Certification

cETLus listed for damp locations.

Warranty

Specifications and dimensions
subject to change without notice.

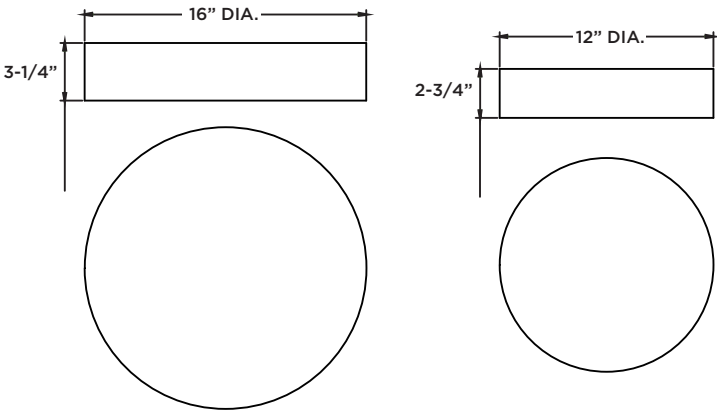

Ordering Information:

Black/Gold	White/Black	LED	Source Lumens	CCT	DIA.	D
		17.5W	1400	3000K	12"	2-3/4"
		31W	2600	3000K	16"	3-1/4"