Installation manual

Dimensions: D20" H13" L9

Bulb Type:E12 bulb not included
Lamp Frame Weight(1bs):14
Total Weight(1bs):35.7

Thank you for choosing our product(s).

Our Company is actively involved in every step of the production.

Our product(s) are designed to be utilized for every application that graces your home or business.

We pride ourselves in providing the most prompt and courtesy service to all of the valued customers.

Please find the enclosed detailed instruction and read carefully for proper installation.

If you have any questions, our professional customer service team is committed to assisting you, please call our toll free HOTLINE







SAFETY


Warning: MAKE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF BY EITHER REMOVING THE FUSE OR TURNING OFF THE CIRCUIT BREAKER.

CAUTION

- Before assembling the lighting fixture, please read all instructions carefully.
- All frame & crystal components are fragile, please handle with care.
- Required supply circuit:110 130V/60Hz
- Labeled wires are "L" for live wire, "N" for neutral wire, "E" for ground wire.
- Never install fixture on damp ceiling, the room should be dry and well ventilated
- All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes.

Unpack the Package

Please open the box carefully and check all the items are inside the box. If you have any installation, assembling and missing parts questions please call our Customer Service department
Please have model number (at the front page)
where you purchase from and any other relevant information ready our customer service team will provide comprehensive and worry free service to our valued customers.

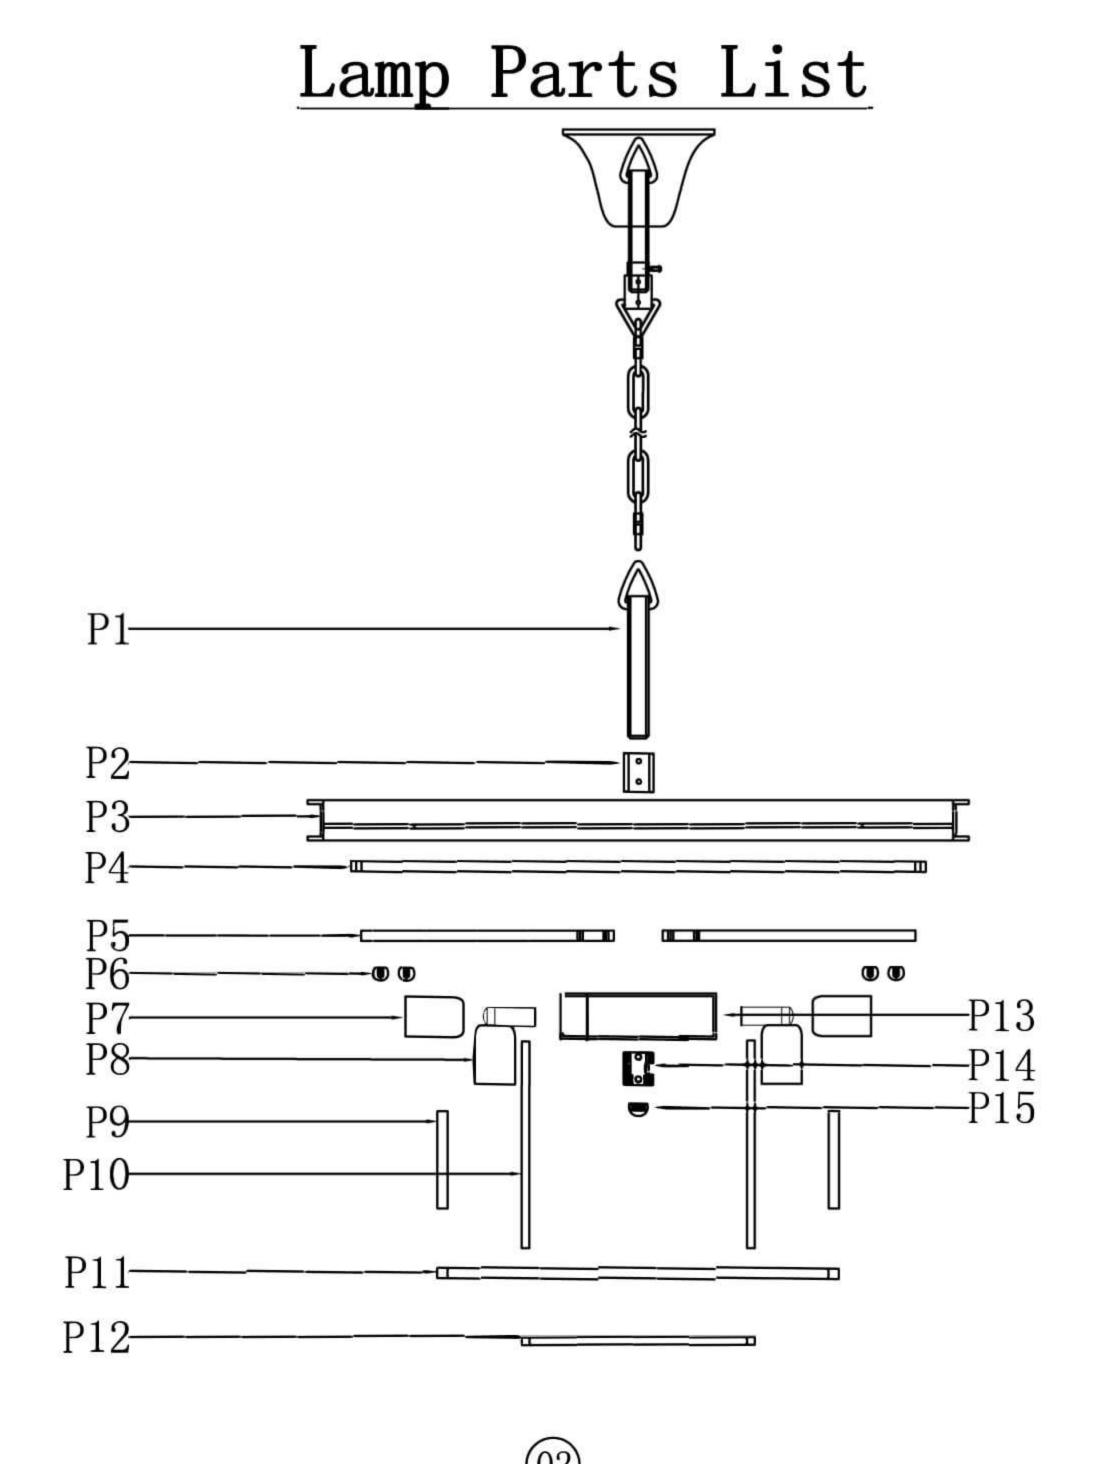

step 1

Please use the parts list to ensure you are not missing any parts


PARTS LIST

part	picture	Description	Qty	Check list		
ZA	\bigcup	∅ 4.7"Ceiling canopy	1			
ZB	-	ø 4 ″ Crossbar	1			
ZC			1			
ZD		Canopy ring	1			
ZE		L59" Twist Design	1			
ZF	~	Power Cord 12' SPT-1-16# Clear/Black	1			
P1		Collar	1			
P2		Coupling	1			
P3	= 3	Hardware combination ring ⊘20″	1			
P4	***************************************	Metal ring Ø17.2"	1			
P5	T_1_T_1	Iron bracket 7.68"	3			
03						

D20" H13" L9

part	picture	Description	Qty	Check list
P6	•	Nut cap	3	
P7		socket	6	
P8		L socket	3	
Р9		Iron bracket 3"	3	
P10		Iron bracket 6.3"	3	
P11	o€ <u>T</u> 190	Metal ring Ø 11.9"	1	
P12	•	Metal ring Ø 6.9"	1	
P13		Cable box	1	
P14		Hickey	1	
P15		Finial	1	
A		611-7.8″	90	

Step 2 Canopy Installation Instruction

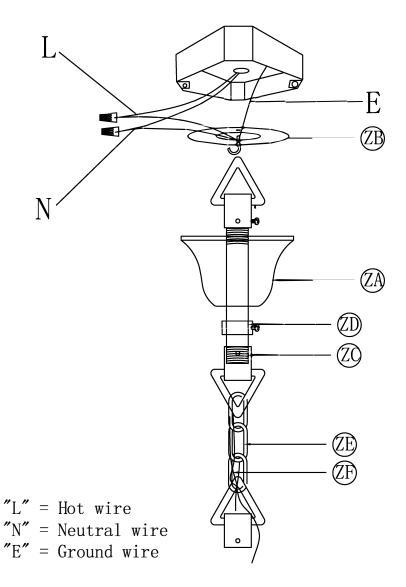


IMPORTANT: Test sockets with bulb before dressing the fixture.

- 1 .Drill a $\phi 0.7''$ hole in the ceiling reinforcement to
- allow a $^{11}\!\!/_{16}$ " threaded rod to pass through. 2 .Attach the electrical box to the ceiling reinforcement and pass the $^{11}\!\!/_{16}$ threaded rod through the box and secure it to the heavy duty hickey.
- 3 . Pass the fixture wires and ground wire through the loop, canopy ring, center hole of canopy and the heavy duty hickey.
- 4 .Pull ceiling wires down through the fixture box and make connection.
- 5 . Screw loop only onto threaded pipe.
- 6 . Hang the fixture on chain.
- 7 . Secure the canopy with canopy ring.

Step 3

Frame Assembly Instructions

Frame Assembly Diagram

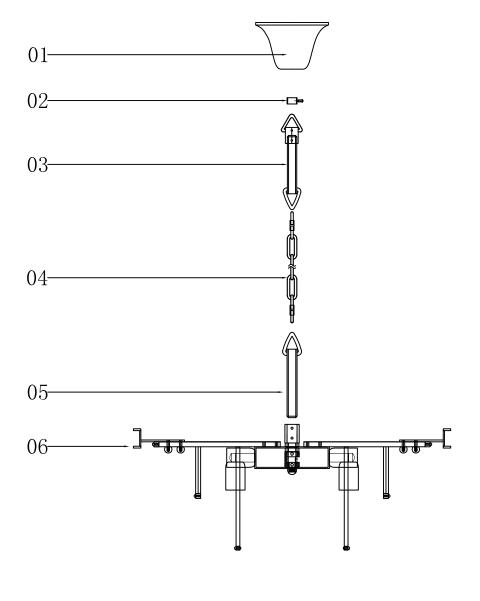

Installation:

Please read all instructions carefully.

Before you proceed to install, make sure that the power supply is turned off and remains off until installation is complete. Please note that each part has been assigned a number. Please proceed in a numerical order.


- 1. Fix the crossbar on the junction box on the ceiling.
- 2. Unscrew loop of the threaded pipe (03), hang the canopy ring (02) and ceiling canopy on the threaded pipe (03), screw loop only onto the threaded pipe (03), then hang on the crossbar, hang the chain (04) on the threaded pipe (03) with the safe lock.
- 3. Connect all wire on the lamp body (06) correctly, pull on main wire through the threaded pipe (05), then assembly the threaded pipe (05) and lamp body (06).
- 4. Hang the lamps on the chain (04) by safe lock, pull on main wire along the chain (04) and arrive the threaded pipe (03) by the junction box, then connect all wire on the junction box correctly.
- 5. Fix the ceiling canopy on the ceiling with the canopy ring.
- 6. As the crystal instruction, hang the crystal parts.

Step 4 Crystal Dressing Instructions

1. Hang crystal:A.

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

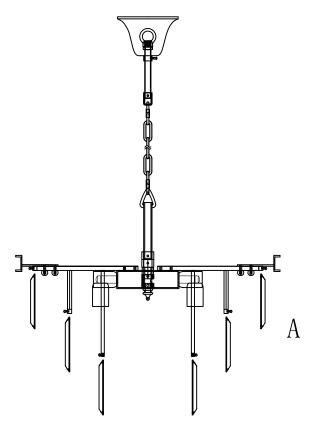

Congratulations!

You are now done installing your fixture. Sit back and admire each crystal as it will become the statement piece for your room/house.

If you require any additional assistance, please contact us

Thank you.

Cleaning and Maintenance of Chandelier Frame
The finish on our chandelier frames and fixture frames is
protected by a durable coating of lacquer. To clean, use
a clean, soft, dry cloth. Do not use any metal polishes,
cleaners, abrasives or any substance which could remove
the protective finish. Failure to follow these
instructions automatically voids the guarantee.

Cleaning and Maintenance of Crystals Wet a soft cotton fabric in clean warm water and wipe gently, then polish with a dry soft cotton fabric.

To Order Crystal Replacement Parts
Should you require replacement crystals or pins (the metal connectors attaching the crystals), contact the store where the product was purchased or contact us at the address shown on the reverse side. For ease of ordering, you may use the original crystal trimming instructions provided with this product and circle the items you wish to order, indicating the quantity by writing the number needed adjacent to the circle and faxing it to our customer service department. You will be contacted with prices prior to shipment. All orders must be pre-paid.

Warranty

The finish and frame of your new chandelier or fixture are warranted for a period of two(2) years from the date of purchase. Our company will at its option, repair or replace any frame that has a defect in the material or workmanship during the warranty period. All crystals are guaranteed for their original quality during the life of the chandelier. Breakage is not covered by this warranty.

To make a claim under this warranty, contact our customer service department at the address and phone number shown below. A written return authorization form will be sent to you with specific instructions.

Returns and Conditions of Warranty

Returns must be pre-authorized by contacting our customer service department at the address on the reverse side. Returns will only be accepted with a written return merchandise authorization and return shipping charges pre-paid. We reserved the right to inspect all returned merchandise to fully determine the nature of any defect. This guarantee shall not apply to any product that has been changed, altered or otherwise modified, nor shall it apply to any product that has been repaired or altered by anyone other than a pre-authorized facility. We will not be responsible for any breakage or damages incurred during transit, nor for crystal parts or metal frame part that have been subject to misuse, negligence, accident or inappropriate handling. Also, we will not be held responsible for damage incurred during improper installation or wiring by others, nor for damages resulting from a failure to follow the recommended maintenance or installation procedures. This guarantee is issued in lieu of any and all other guaranteed or warranty, whether written or implied and any and all other obligations or liabilities. Further, we neither authorize nor permit any other person or firm to assume for us, any liability in connection with the sale of our products.